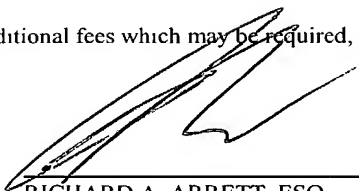


10070862.071302

JC07 Rec'd PCT/PTO 1 1 MAR 2002

| | | |
|--|---|---|
| FORM PTO-1390 (REV 10-94) U.S. Dept. of Commerce and Patent and Trademark Office TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 | | ATTORNEY'S DOCKET NUMBER: H01.2-10378 |
| | | U.S. APPLICATION NO. (if known): 10/070862 |
| INTERNATIONAL APPLICATION NO.: PCT/EP00/08999 | INTERNATIONAL FILING DATE (14.09.00): 14 September 2000 | PRIORITY DATE CLAIMED (dd/mm/yy): 14 September 1999 (14.09.99) |
| TITLE OF INVENTION: FIXATION SYSTEM FOR BONES | | |
| APPLICANT(S) FOR DO/EO/US: Dietmar Wolter; Uwe Schumann, Klaus Seide | | |
| Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information: | | |
| 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. | | |
| 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. | | |
| 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). | | |
| 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. | | |
| 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ul style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States receiving Office (RO/US). | | |
| 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371 (c)(2)). | | |
| 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ul style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. | | |
| 8. <input checked="" type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). | | |
| 9. <input type="checkbox"/> An oath or declaration of the inventor (35 U.S.C. 371(c)(4)). | | |
| 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). | | |
| Items 11. to 16. below concern other document(s) or information included: | | |
| 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. | | |
| 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.29 and 3.31 is included. | | |
| 13. <input type="checkbox"/> A FIRST preliminary amendment. Please enter the amendment before fee calculation. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. | | |
| 14. <input type="checkbox"/> A substitute specification. | | |
| 15. <input type="checkbox"/> A change of power of attorney and/or address letter. | | |
| 16. <input type="checkbox"/> Other items or information: | | |

| | | | | | |
|---|--|---------------------|--|------------------------|----|
| 17. <input type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(A)(1)-(5)): <i>(select the appropriate one of the following fees)</i> Search Report has been prepared by the EPO or JPO \$ 930.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$ 490.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$ 750.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$ 1,070.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Articles 33(2)-33(4) \$ 98.00 ENTER APPROPRIATE BASIC FEE AMOUNT = | CALCULATIONS \$ 930.00 | PTO USE ONLY | | | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). | | | | | |
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | | |
| Total Claims | 14 - 20 = | | x \$ 22.00 | \$ | |
| Independent Claims | 2 - 3 = | | x \$ 82.00 | \$ | |
| Multiple Dependent Claims (if applicable) | | | + \$ 270.00 | \$ | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$ | |
| Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must be filed also. (Note 37 CFR 1.9, 1.27, 1.28). | | | | \$ | |
| SUBTOTAL = | | | | \$930.00 | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | \$ | |
| TOTAL NATIONAL FEE = | | | | \$930.00 | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property | | | | \$ | |
| TOTAL FEES ENCLOSED = | | | | \$930.00 | |
| | | | | Amount to be: Refunded | \$ |
| | | | | Charged | \$ |
| a. <input checked="" type="checkbox"/> A check in the amount of <u>\$930.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees is enclosed. A duplicate copy of this sheet is enclosed. c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 22-0350. | | | | | |
| Send All Correspondence To: Vidas, Arrett & Steinkraus, P.A. Suite 2000 6109 Blue Circle Drive Minnetonka, MN 55343-9185 Telephone: (952) 563-3000 Facsimile: (952) 563-3001 | | | By:  RICHARD A. ARRETT, ESQ. Registration No. 33,153 | | |

2/pst

10070862 10/070862

JC13 Rec'd PCT/PTO 11 MAR 2002

1

5

FIXATION SYSTEM FOR BONES

CROSS-REFERENCE TO RELATED APPLICATIONS

Not Applicable

10 STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

Not Applicable

BACKGROUND OF THE INVENTION

15 The invention relates to a fixation system for bones with a force support having holes and bone screws which are insertable into the holes and are fixable there.

If fragments of broken bones have to be joined to each other plate, nail and fixateur systems are available nowadays. Stability in plate and nail systems has been reached hitherto by the fact that if osteosynthetic plates were used bone screws
20 firmly pulled these plates up to the bones in order to achieve a stabilization of the fragments of broken bones by means of the contact pressure which the plate exerts on the bone. If a marrow nail is used which is in the marrow space stability will also be increased by transversely inserting screws through the bone and the marrow nail. Although these screws are located in the bone by a thread minor motions are
25 possible because the screw passes through the nail.

A fixation plate for the osteosynthesis of the aforementioned type has been known from U.S. 4 683 878. The plate has a central portion the width of which is distinctly smaller than is the width of the end portions. The end portions of the fixation plate have a plurality of oblong holes. The thickness of each end portion
30 decreases, starting from the central portion to the outer ends of the fixation plate. The plurality of oblong holes have a vertical distal limitation wall and an inclined proximal limitation wall which inclines towards the vertical limitation wall. Each end portion is of a uniform width and the entire lower side of each end portion may be concavely formed to provide a complementary counter-surface to the broken
35 bone. If the bone screws are employed with a head the lower surface of which is

.../2

5 rounded the fixation plate pulls the bone pieces together and keeps the bone pieces under a pressure at the point of fracture once the plate and screws are completely fixed to the bone.

Different technical solutions were successful in fixedly joining the head of the screw to the plate or to establish a fixed connection between the screw and the marrow nail itself. In this respect, reference is made to EP 0 201 024 B1, DE 43 43
10 117 A1, DE 196 29 011 A1, and the German Patent Application P 198 58 889.5.

Hence, it is proper to speak of inner fixateur systems in this new generation of implants because the main feature of the outer fixateurs is angular stability between the screw and the transverse force support.

15 In clinical application, these fixateur-interne systems have distinctly exhibited a superiority over conventional plate and nail systems up to now.

However, if the patient loads the implant with too much of his body weight too early, which is contrary to a doctor's advice, the implant might be spoiled by bending or the implant might break.

20 Furthermore, it has been observed that if bones are soft and are subjected to high bending loads the screws can be torn out of the bone.

BRIEF SUMMARY OF THE INVENTION

Accordingly, it is the object of the invention to improve the fixation system
25 for bones according to the first mentioned document with regard to its load effects.

The object is achieved by a fixation system for bones having the features of claim 1. The object is further achieved by a fixation system for bones having the features of claim 4. Advantageous aspects of the fixation system are indicated in the claims 2 to 3 and 5 to 13.

30 The invention relies on the surprising finding that the screw hole which is nearest to the zone of fracture or instability of a bone is subjected to the maximum load and that the cause of failure lies in this area.

5 If a comparison is made between the mechanics of conventional plate systems lacking angular stability to fixateur interne systems enjoying angular stability a fundamental difference can surprisingly be recognized when under a load.

 Even if plate systems are used which lack angular stability we will find plate fractures which, as a rule, extend through a plate hole or lead to loosening phenomena with the screws exiting from the bone. If plate systems are used which
10 enjoy angular stability no change of the screw position will occur with respect to the plate itself or the marrow nail because the head of the screw is fixedly anchored in the plate or the screw is fixedly anchored in the marrow nail. This means that forces which act have no uniform effect on a deformation of the plate or the nail as can be
15 encountered more or less in implants which are not angularly stable, but that these forces cause an intensified load by bending in the area of the screw hole which comes to lie closest to the zone of fracture or instability. Even if the patient behaves reasonably and correctly and, hence, a regular course of healing takes place with conventionally dimensioned, angularly stable implants the fracture at this point
20 following the mistake of an overstress is an indication that the forces acting here lead to a damage. At this stage, a failure of the implant might then occur.

 Therefore, the invention provides for a reinforcement of the force support at the hole which requires to be disposed in the vicinity of the zone of fracture of instability of a bone. In the case of holes requiring to be disposed farther away, the
25 force support need not have any reinforcement. However, since we can assume that the force support will be under a higher load not only at the first hole, but a higher load will also have to be absorbed by the succeeding hole the hole that follows next also is preferably provided with a reinforcement the dimensions of which, however, may be distinctly smaller. Thus, the adjoining hole may have a reinforcement
30 reduced by about its half. However, the holes which are farther away may be considered to be non-critical, as a rule, and mostly need no reinforcement for this reason.

 The reinforcement of the force support may be obtained in different ways:

- 5 1. by an increase in the cross-section of the force support, particularly
- 1.1 by a thickening of the force support (in the direction of the hole), and/or
 - 1.2 by a widening of the force support (in a cross direction of the hole)
which can be arc-shaped towards the outside, for example, and/or
 - 1.3 by a reduction in the cross extension (particularly that of a diameter of
the hole, and/or
2. by a stronger material of the force support in the hole area.

In preferred aspects of the fixation system, the bone screws can be inserted⁵⁰
into the holes of the force support under different angles and can be fixed in the
holes. To this effect, the force support and bone screws can be configured according
10 to the patent applications mentioned at the beginning, particularly according to DE
43 43 117 A1, DE 196 29 011 A1, and P 198 58 889.5.

The fixation system according to claim 4 is based on the surprising finding
that bone screws are susceptible to being torn out particularly if they are introduced
into the bone in parallel with each other. To avoid such exiting from the bone, at
15 least two holes which are not in parallel with each other, but are obliquely inclined
towards each other, are drilled into the force support.

The aspect of the fixation system according to claim 7 is based on the
surprising finding that bone screws are susceptible to extraction particularly if they
are introduced into the bone in parallel with each other. To avoid such exiting from
20 the bone, at least two holes are drilled into the force support which are not in parallel
with each other, but are obliquely inclined towards each other. In exchange, at least
one hole may be obliquely inclined towards the force support as compared to
conventional force supports into which the holes are drilled at an angle of 90° from
the force support (or from a central plane or a supporting plane thereof on the bone).
25 Preferably, two or more holes can be disposed in an appropriately inclined fashion
towards each other. It is preferred here that holes which require to be disposed on
different sides of a zone of fracture or instability of a bone are disposed so as to be
inclined towards each other in different directions.

- 5 -

5 Since the bone, as a rule, has curved surfaces and this is the case particularly
in the area close to joints it is necessary that plate systems, in particular, be adapted
to such bone curvatures. As a rule, this operation is accomplished by appropriate
bending tools during the surgery. It is also possible here to vary the orientation of
plate holes in accordance with the conformation. If a distinct bone surface curvature
10 is found, e.g. in the area close to joints, the screw hole if obliquely placed may make
it even easier to achieve an optimal screw position in the bone. This can be taken
into account from the very beginning in orienting holes in the plate so that a desired
oblique orientation of at least two holes is achieved in the plate upon conformation.

 Preferably, the bone screws may be adapted to be inserted into the holes of
15 the force support under different angles and to be fixed therein. The force support
and the screws can be configured here according to the patent applications
mentioned at the beginning, particularly according to DE 43 43 117 A1, DE 196 29
011 A1 or P 198 58 889.5. The fact that at least two holes are obliquely inclined
towards each other in the force support makes it possible to introduce at least two
20 bone screws into the force support so as to be inclined towards each other from the
very beginning without using up the clearance furnished by the fixability under
different angles. This significantly improves the possibilities to straddle the screws
in the bone by giving them an oblique position.

 In particular, the fixation system can be a bone plate, a bone nail or a
25 fixateur.

 An optimization of the hole configuration with regard to an increase in cross-
section adapted to the flow of forces or a selection of the materials or the obliquely
oriented holes allow to avoid a possible fracture of the force support if the patient
behaves improperly or an extraction of the implant also in case of an overstress.

30

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

 The invention will now be explained in greater detail with reference to the
accompanying drawings of embodiments. In the drawings:

- 5 Fig. 1 shows a bone plate with widened portions in a partial top view;
 Fig. 2 shows a bone plate with thickened portions in a partial longitudinal
section;
 Fig. 3 shows a curved bone plate on a tibia bone close to a joint in a partial
longitudinal section;
10 Fig. 4 shows a bone plate with inclined holes at the central region of a
tubular bone in a longitudinal section;
 Fig. 5 shows a bone plate with holes of different diameters at the central
region of a tubular bone in a longitudinal section.

15

DETAILED DESCRIPTION OF THE INVENTION

While this invention may be embodied in many different forms, there are
described in detail herein a specific preferred embodiment of the invention. This
description is an exemplification of the principles of the invention and is not
20 intended to limit the invention to the particular embodiment illustrated.

According to Fig. 1, a bone plate 1 has three plate holes 2, 3, 4 in a portion.
Of these, plate hole 2 requires to be disposed nearest to a zone of fracture of
instability of a bone, hole 3 requires to be disposed at a larger distance, and hole 4
requires to be disposed at the largest distance therefrom. Bone plate 1 has a
25 reinforcement in the form of a large widened portion 5 around hole 2. There is also a
reinforcement in the form of a widened portion 6 at hole 3 which, however, is only
half the size of the widened portion 5. There is no longer a widened portion at hole
4, but the bone plate is of a substantial constant width here. The widened portions 5,
5 each consist of bent-out regions on the two sides of bone plate 1.

30 In the cut-away region (on the left in the drawing), which requires to be
disposed on the other side of the zone of fracture or instability of a bone, an
appropriate sequence of holes may exist with an appropriate reinforcement.

- 7 -

5 Fig. 2 shows a bone plate 7 the holes 8, 9, 10 of which require to be correspondingly associated with a zone of fracture or instability of a bone. Therefore, it is designed with a maximal thickened portion 11 adjacent to hole 8, a thickened portion 12 which is only half this size adjacent to hole 9, and has no thickened portion adjacent to hole 10.

10 A bone plate (or another force support) can also have widened portions 5, 6 according to Fig. 1 and thickened portions 11, 12 according to Fig. 2 in a combination.

 According to Fig. 3, a bone plate 13 has been deformed by bending in such a way that it matches well with the articulation of a tibia bone 14. It has holes 15, 16.
15 More holes may exist on the cut-away part of the bone plate 13. The axis of the hole 15 is oriented perpendicularly to the bone plate 13. The axis of the hole 16 is inclined towards the bone plate or its support surface on the bone from the very beginning. The inclination of the axis of the hole 16 is planned here so as to provide an oblique orientation of the axes of the holes 15, 16 towards each other after the
20 plate is conformed to the bone 14. This causes screws which were turned in to be straddled in the bone, which counteracts an extraction of the implant from the bone.

 According to Fig. 3 (and also in all further embodiments), the holes 15, 16 of the bone plate 11 are provided with a circumferential ridge 15', 16' at their inner circumference. A bone plate having a thread at the lower side of its head may be
25 turned into this ridge 15', 16' in different angular positions, which causes the ridge 15', 16' to be reshaped depending on what the angle is from the axis of the hole 15, 16 at which the bone screw is turned in. Moreover, while the ridge or the thread of the screw is being reshaped, the screw is caused to be secured in its turned-in position in the bone. The pre-planned oblique position of the axes of the holes 15, 16
30 towards each other makes possible an inclined orientation of the bone screws towards each other without using up the clearance furnished for fixability under different angles in the bone plate 11. Thus, a straddled position and optimal

5 orientation of the bone screws in an individually optimizable angular position in their holes 15, 16 are achieved simultaneously.

Fig. 4 shows a bone plate 19 the two middle holes 20, 21 of which have their axes 22, 23 conventionally oriented perpendicularly to the bone plate. The two outer holes 24, 25, however, have their axes 26, 27 oriented at acute angles from the bone plate 18. As a result, the bone screws requiring to be turned into the two outer holes 24, 25 will be straddled in an adjoining bone 28, thus ensuring a safe mounting. This provides a fixability of the bone screws in the holes 20, 21, 24, 25 under different angles also in this example of an application.

Fig. 5 shows a bone plate 29 which has conical holes 30 to 35. These are tapered from the upper side towards the lower side of the bone plate 29.

The two holes 30, 31 which are located nearest to the centre of gravity of the bone plate 29 are of smaller dimensions than are the two holes 32, 33 which are located more outwardly. The latter, in turn, are of smaller dimensions than are the holes 34, 35 which are located most outwardly. Here, the middle holes 30, 31 are of identical dimensions in the example shown. Further, the more outwardly located holes 32, 33 are of coinciding dimensions. Ultimately, the pair of holes 34, 35 also are of coinciding dimensions.

Because of the size distribution depicted for the holes 30, 35, the bone plate 29 has the largest cross-section in the area of holes 30, 31, a slightly smaller cross-section in the area of holes 32, 33, and the smallest cross-section in the area of holes 34, 35. The bone plate 29 can be designed to have a constant thickness and width at any point. As a principle, however, a widened portion and/or thickened portion according to the embodiments of Figs. 1 and 2 may be added.

By means of bone screws 36 to 41 which were turned in, the bone plate 29 is fixed to a tubular bone 42 in such a way that a fracture zone is disposed precisely between the two central holes 30, 31. The force introduced into the bone plate 29 via the bone screws 36 to 41 is the larger the closer the respective bone screw is located to the fracture zone 43. The bone plate 29 corresponds to this fact, with regard to

5 strength, by being of a cross-section which is the larger the closer the holes 30 to 35 are located to the fracture zone 43.

Incidentally, the bone screws 36 to 41 have a conical thread each, which is turned into the respective hole 30 to 35, above their threaded shanks at the lower side of their heads. Because of their conicity, the threads can be turned in at different
10 angular orientations. At this stage, the thread digs its way into the inner surface of the respective hole 30 to 35 at the lower side of the head, resulting in the angular position to be fixed as turned in. What is shown in Fig. 5, however, is an orientation of all bone screws 36 to 41 at an angle of 90° from the plane of the bone plate 29.

The above Examples and disclosure are intended to be illustrative and not
15 exhaustive. These example and description will suggest many variations and alternatives to one of the ordinary skill in this art. All these alternatives and variations are intended to be included within the scope of the attached claims. Those familiar with the art may recognize other equivalents to the specific embodiments described herein which equivalents are also intended to be
20 encompassed by the claims attached hereto.

25

30

- 10 -

5 What is Claimed is:

1. A fixation system for bones with a force carrier (1) having holes (2, 3, 4) and bone screws (36 to 41) adapted to be inserted into and fixed in the holes wherein the force carrier (1) has two adjacent holes (2, 3, 4) which require to be disposed on different sides of the zone of fracture or instability of a bone, and at which the force carrier (1) has a reinforcement (5, 6), as compared to its configuration at holes (2, 3, 4) which require to be disposed at a larger distance from the zone of fracture or instability of a bone, characterized in that the bone screws (36 to 41) are adapted to be fixed in the holes (2, 3, 4) and that at least the two adjacent holes (2, 3, 4) which are disposed on different sides of a portion of the force carrier (1) which is associable with a zone of fracture or instability of a bone are obliquely inclined towards each other with the axes of the two holes (2, 3, 4) diverge on the side of the force carrier (1) which is to face the bone.
2. The fixation system according to claim 1 wherein the reinforcement (5, 6) is an enlargement in cross-section and/or an area where the material of the force carrier (1) is of a larger strength.
3. The fixation system according to claim 2 wherein the enlargement in cross-section is a thickened portion (11, 12) and/or a widened portion (5, 6) of the force carrier (1) and/or a reduction of the transverse extension of the hole (2, 3, 4) of the force carrier (1).
4. A fixation system for bones with a force carrier (1) having holes (2, 3, 4) and bone screws (36 to 41) adapted to be inserted into and fixed in the holes (2, 3, 4) wherein the force carrier (1) has two adjacent holes (2, 3, 4) which require to be disposed on different sides of the zone of fracture or instability of the

- 12 -

- 5 8. The fixation system according to claim 4, characterized in that at least two holes (2, 3, 4) are obliquely inclined towards each other.
9. The fixation system according to claim 8 wherein the axes of the two holes (2, 3, 4) diverge on the side of the force carrier (1) which is to face the bone.
- 10 10. The fixation system according to claim 9 wherein the at least two holes (2, 3, 4) obliquely inclined towards each other are disposed on different sides of a portion of the force carrier (1) which requires to be associated with a zone of fracture or instability of a bone.
- 15 11. The fixation system according to claim 1 wherein at least one hole (2, 3, 4) is obliquely inclined towards the force carrier (1).
12. The fixation system according to claim 1 wherein at least two holes (2, 3, 4) of
- 20 the force carrier (1) conformed to a bone are obliquely inclined towards each other.
13. The fixation system according to claim 1 wherein the bone screws (36 to 41) are adapted to be inserted into and fixed in the holes (2, 3, 4) of the force
- 25 carrier (1) under different angles.
14. The fixation system according to claim 1 wherein the force carrier (1) is a bone plate, a bone nail or a fixateur.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
22. März 2001 (22.03.2001)

PCT

(10) Internationale Veröffentlichungsnummer
WO 01/19264 A2

(51) Internationale Patentklassifikation⁷: **A61B 17/56**

(21) Internationales Aktenzeichen: PCT/EP00/08999

(22) Internationales Anmeldedatum:
14. September 2000 (14.09.2000)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
199 43 924.9 14. September 1999 (14.09.1999) DE
199 62 317.1 23. Dezember 1999 (23.12.1999) DE

(71) Anmelder und

(72) Erfinder: **WOLTER, Dietmar** [DE/DE]; Berufsgenossenschaftliches Unfallkrankenhaus, Bergedorfer Strasse 10, D-21033 Hamburg (DE).

(74) Anwälte: **SIEMONS, Norbert**; Neuer Wall 41, D-20354 Hamburg usw. (DE).

(81) Bestimmungsstaaten (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Bestimmungsstaaten (*regional*): ARIPO-Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI-Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Veröffentlicht:

— Ohne internationalen Recherchenbericht und erneut zu veröffentlichen nach Erhalt des Berichts

Zur Erklärung der Zweibuchstaben-Codes, und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen

(54) Title: **FIXING SYSTEM FOR BONES**

(54) Bezeichnung: **FIXATIONSSYSTEM FÜR KNOCHEN**

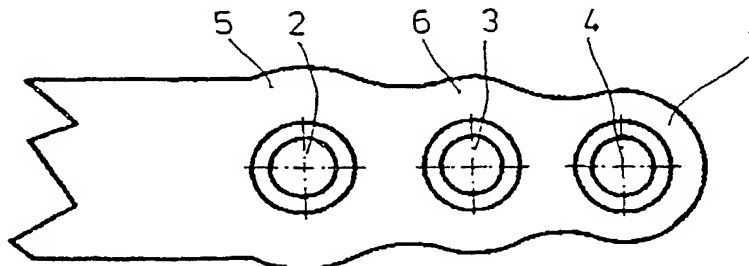

(57) Abstract: The invention relates to a fixing system for bones, comprising a force-bearing device with holes and bone screws which can be introduced into said holes and fixed. The invention is characterised in that said force-bearing device is reinforced in the area of a hole located near a break or an area where the bone is weak, compared to in the area of a hole located further away from the break or the area where the bone is weak.

(57) Zusammenfassung: Fixationssystem für Knochen mit einem Kraftträger mit Löchern und in die Löcher einsetzbaren und fixierbaren Knochenschrauben, dadurch gekennzeichnet, daß der Kraftträger an einem Loch, das in der Nähe einer Bruch oder Instabilitätszone eines Knochens anzuordnen ist, eine Verstärkung hat, im Vergleich zu seiner Ausgestaltung an einem Loch, das weiter von der Bruch- oder Instabilitätszone des Knochens anzuordnen ist.

WO 01/19264 A2

1/2

Fig.1

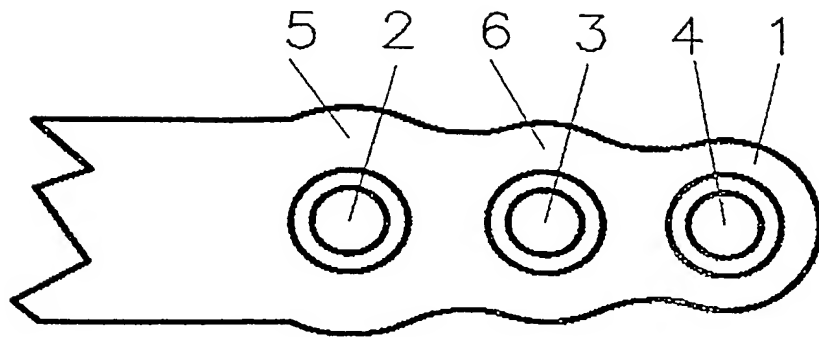


Fig.2

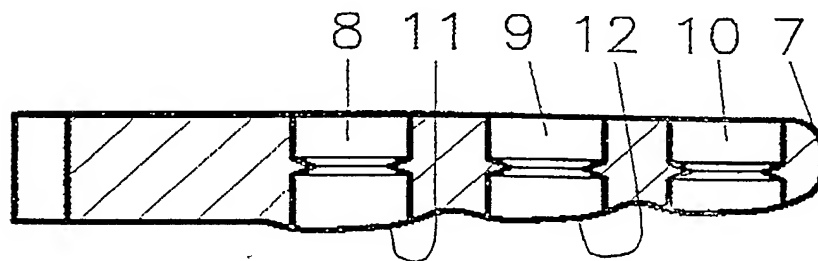


Fig.3



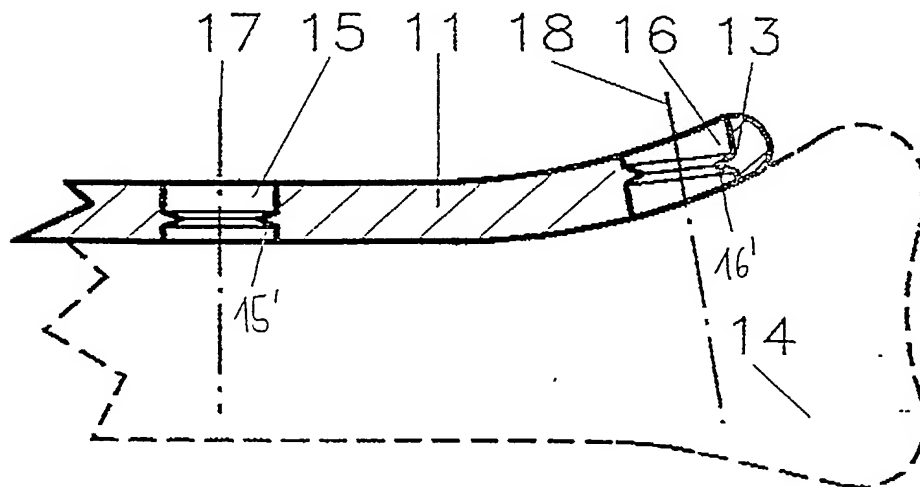


Fig.4

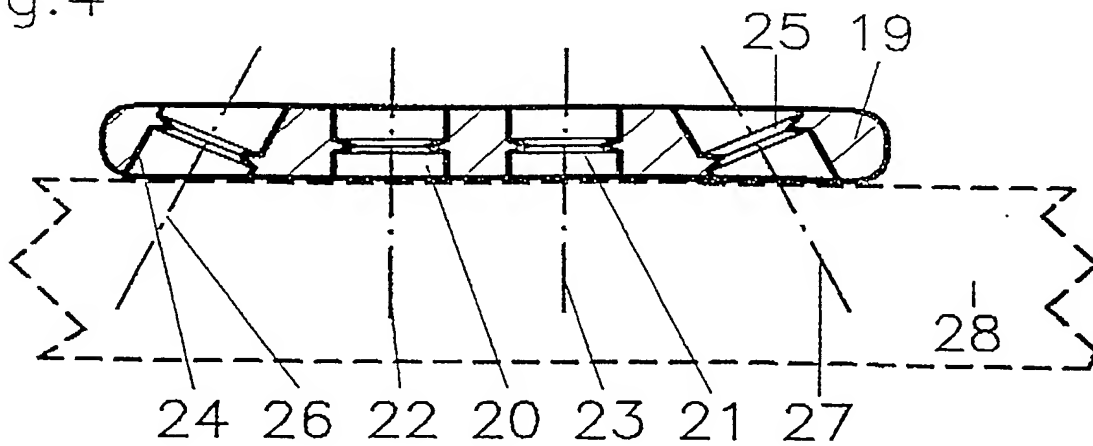

2/2

Fig. 5

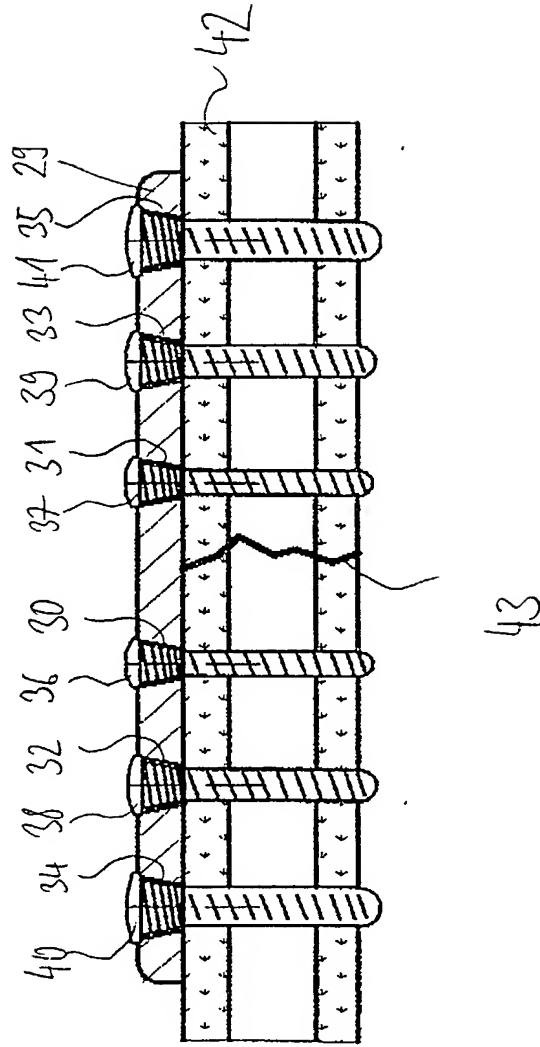

PATENT/DESIGN PATENT

DECLARATION

As a below-named inventor, I(we) hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name,

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FIXATION SYSTEM FOR BONES

filed on March 11, 2002 under Ser. No. 10/070862.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to in the declaration.

I acknowledge the duty to disclose all information which is known to be material to patentability of this application in accordance with Title 37, Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

(List prior foreign applications)

| COUNTRY | APPLICATION NUMBER | DATE OF FILING (day, month, year) | PRIORITY CLAIMED UNDER 37 USC 119 |
|---------|--------------------|--------------------------------------|---|
| DE | 199 43 924.9 | 14/09/1999 | <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO |
| DE | 199 62 317.1 | 23/12/1999 | <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO |
| | | | <input type="checkbox"/> YES <input type="checkbox"/> NO |

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Telephone calls and correspondence should be directed to:

VIDAS, ARRETT & STEINKRAUS
Customer # 490

Sole or First Inventor

Second Inventor 2-00

Full Name: Dietmar Wolter

Full Name: Uwe Schumann

Inventor's
Signature:

Inventor's
Signature:

Date:

Date:

Citizenship:

Citizenship:

Post Office
Address:

Post Office
Address:

Residence:
(if different
from post
office address)

Residence:
(if different
from post
office address)

(Attach additional sheets for third and subsequent inventors)

Third Inventor

3. W

Full Name: Klaus Seide

Inventor's
Signature: X Klaus Seide

Date: X 1.7.02

Citizenship: DE

Post Office
Address: Blocksberg 13
D-21465 Reinbek/Germany

Residence:
(if different
from post
office address)

Fourth Inventor

Full Name: _____

Inventor's
Signature: _____

Date: _____

Citizenship: _____

Post Office
Address: _____

Residence:
(if different
from post
office address)